

# (12) UK Patent Application (19) GB (11) 2 265 916 A (13)

(43) Date of A publication 13.10.1993

(21) Application No 9307486.2

(22) Date of filing 07.04.1993

(30) Priority data

(31) 9204474

(32) 07.04.1992

(33) FR

(71) Applicant

Aussedat-Rey S.A.

(Incorporated in France)

1 rue du Petit Clamart, B.P. 05, 78141 Velizy  
Villacoublay Cedex, France

(72) Inventors

Laurent Cousin

Fernand Mora

(74) Agent and/or Address for Service

Gill Jennings & Every

Broadgate House, 7 Eldon Street, London, EC2M 7LH,  
United Kingdom

(51) INT CL<sup>5</sup>

D21H 15/02 17/67, D21J 1/16

(52) UK CL (Edition L)

D1R RDB RDK R101 R306 R307 R318 R354 R455

R508 R513 R602

U1S S1698 S1699

(56) Documents cited

WO 88/02048 A1

(58) Field of search

UK CL (Edition L) D1R RDB RDC RDK REZ RFA

RFB RFZ RGA RGB RGZ

INT CL<sup>5</sup> D21H, D21J

Online databases: WPI

*OSA know S200  
MS = possible backlinks  
of related prior art*

(54) Composite product based on fibres and filler

(57) A composite product has a fibrocrystalline heterogenous structure consisting of: on the one hand a plurality of fibres of expanded specific surface area and of hydrophilic character, having a substantial quantity of microfibrils on their surface, and on the other hand crystals of precipitated calcium carbonate, organised essentially in clusters of granules, the majority of which trap the microfibrils and are jointed directly thereto by mechanical bonding. Application to the field of construction materials and papermaking is described. The fibres may be of natural or synthetic cellulose material or acrylic. The calcium carbonate may be precipitated by introducing carbon dioxide to an aqueous suspension of the fibres and of lime.

*ccm  
2.10.1993  
6:1 - 0.2:1 S.9*

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

GB 2 265 916 A

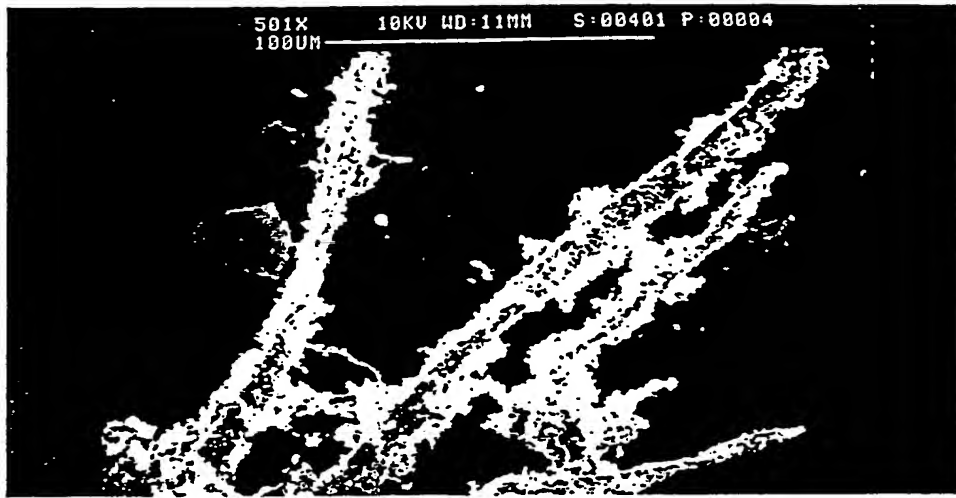


FIG.1

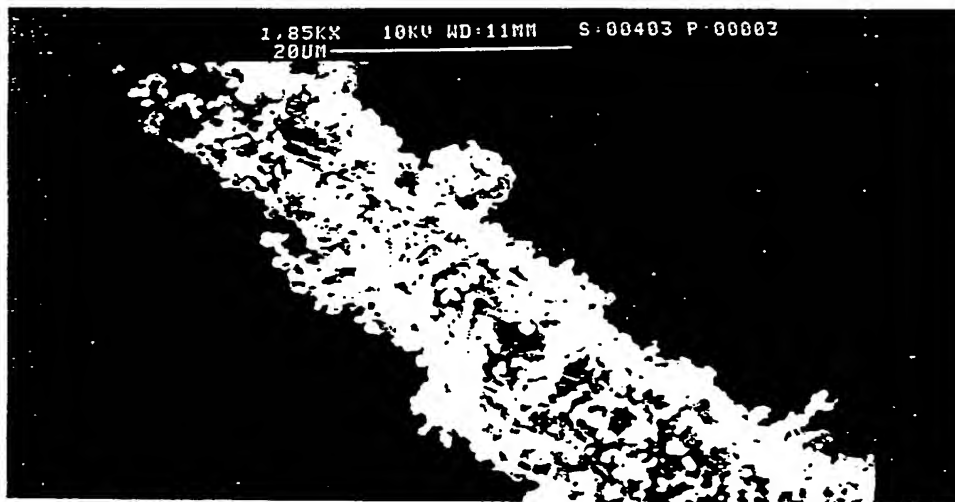


FIG.2



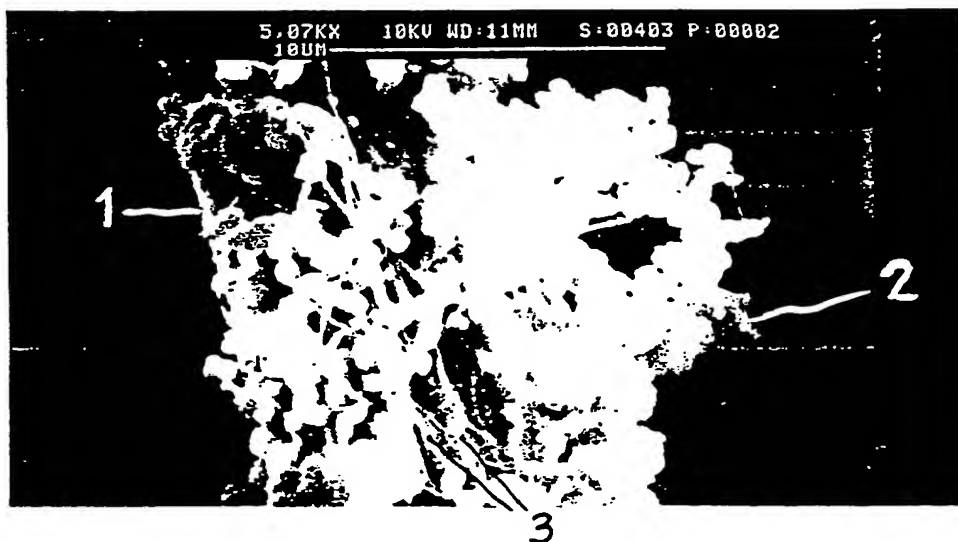


FIG.3

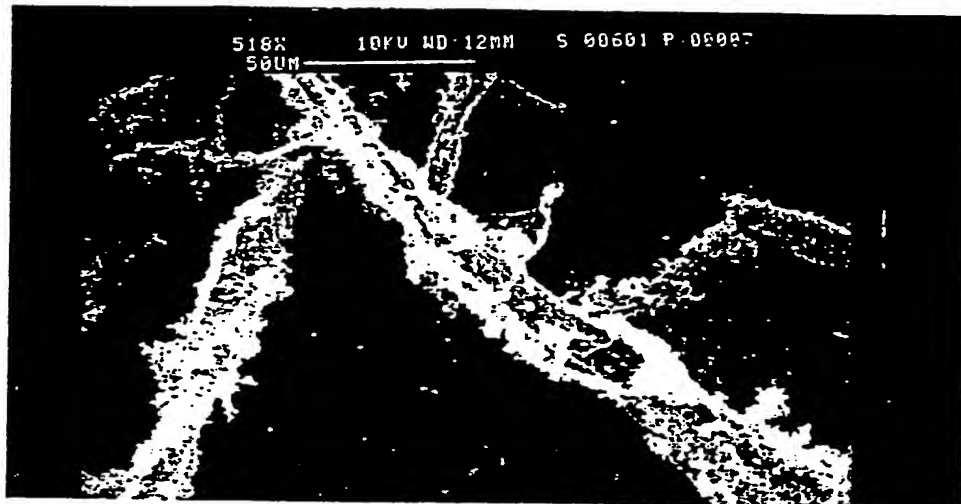

FIG\_4

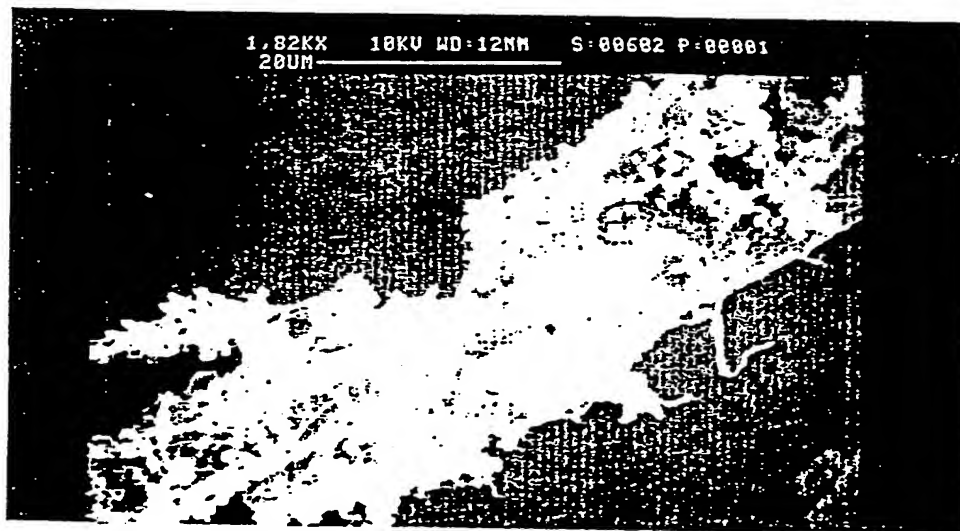

FIG\_5



FIG\_6

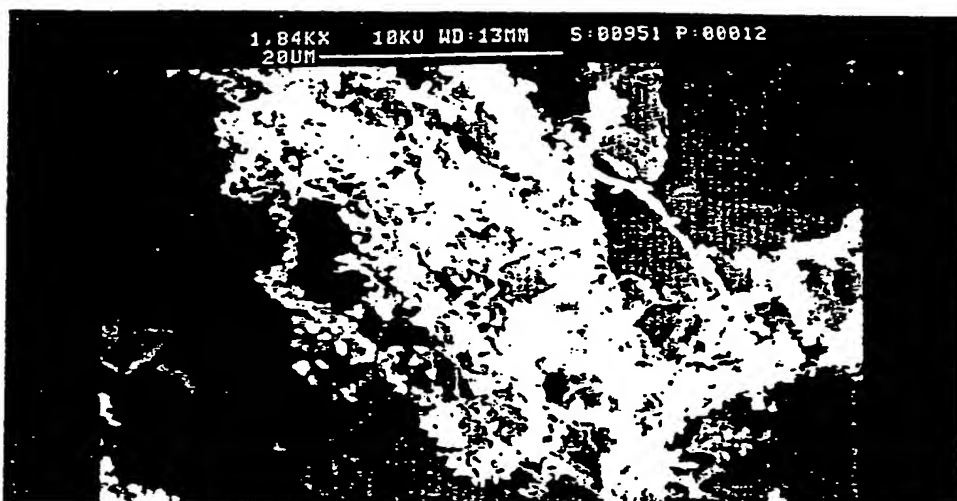


FIG.7



FIG.8



FIG.9

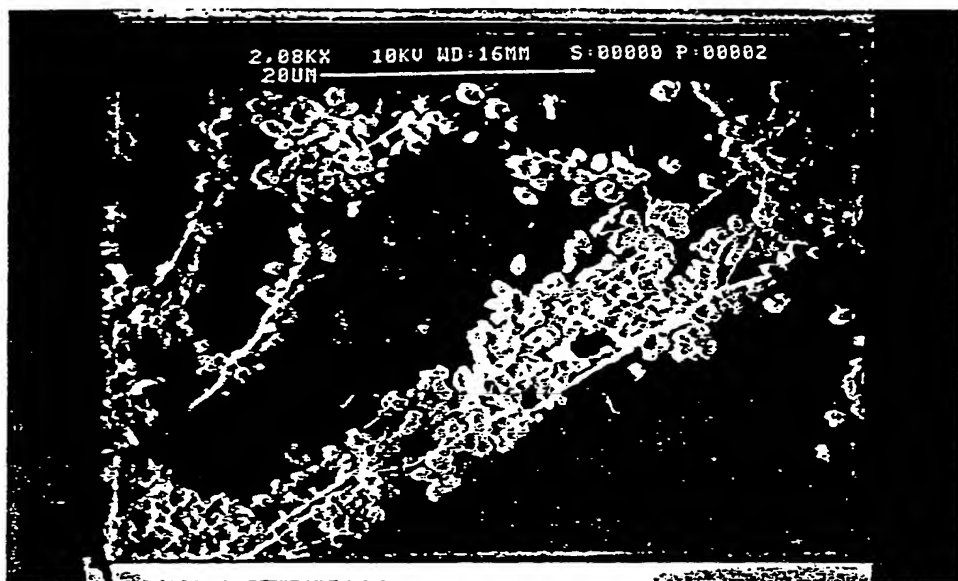


FIG.10



FIG.11

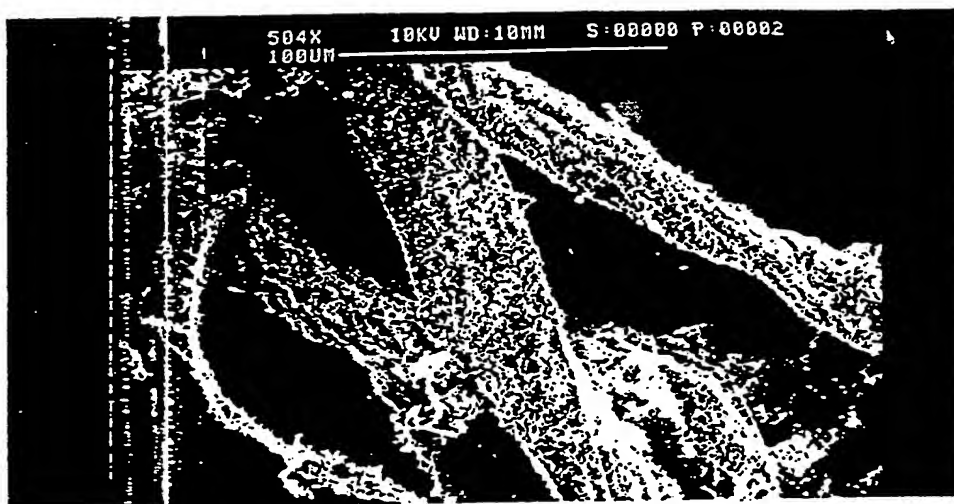


FIG.12



FIG.13

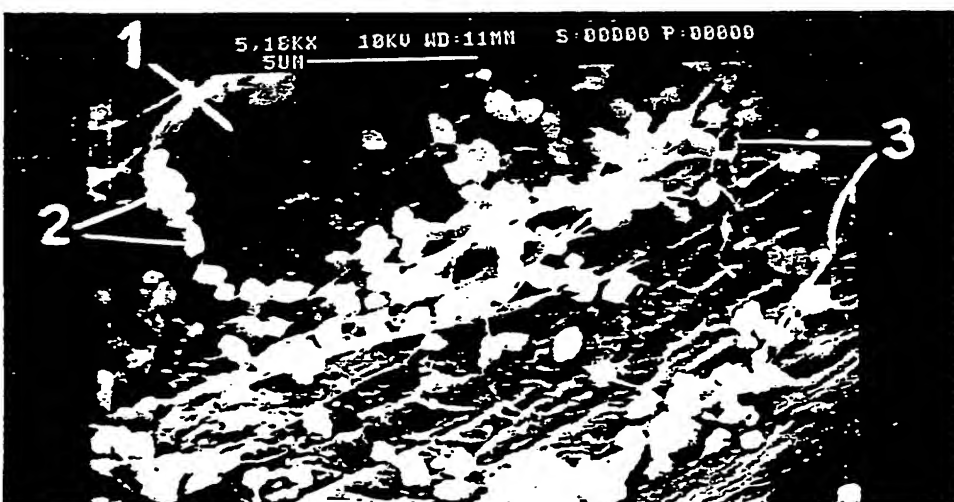


FIG.14

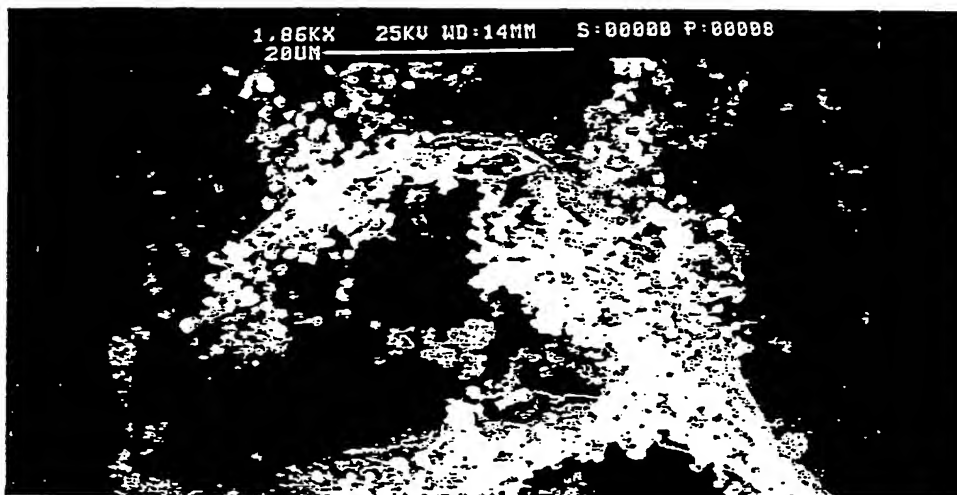


FIG.15



FIG.16

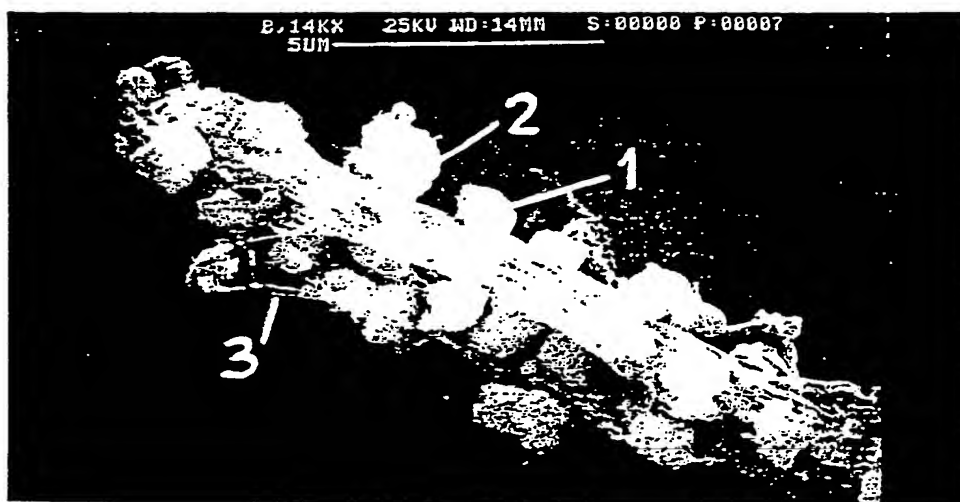


FIG.17

7/11

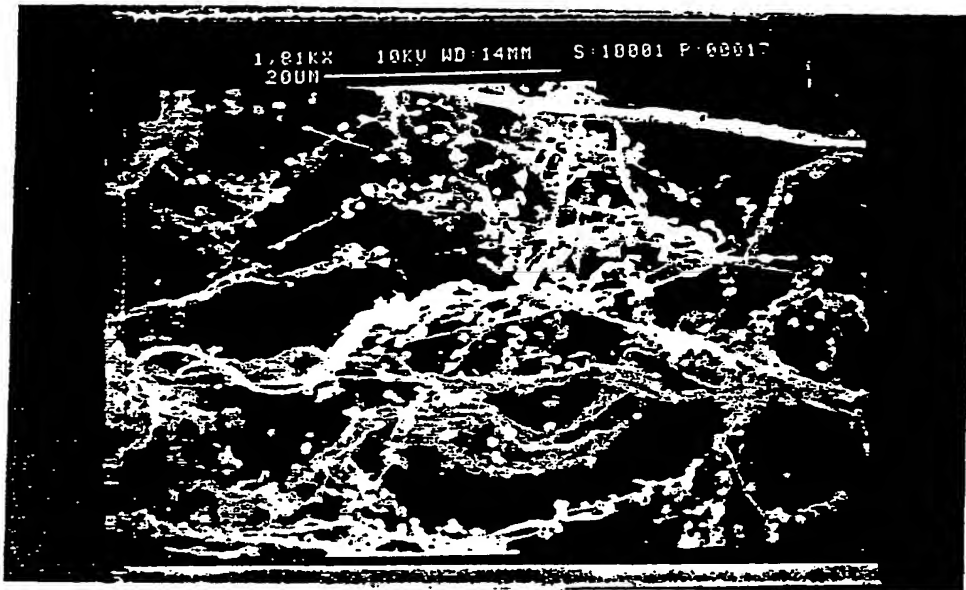


FIG.18

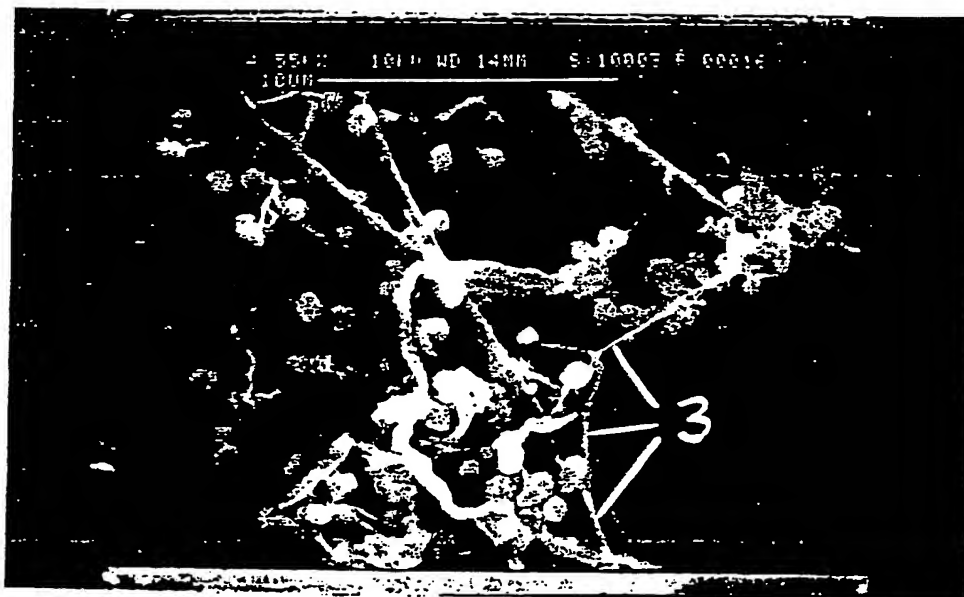


FIG.19



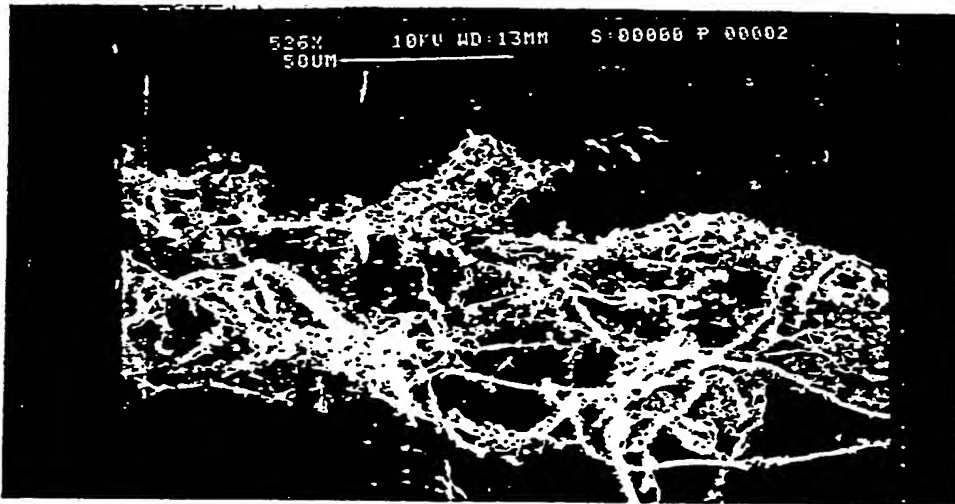


FIG.20



FIG.21



FIG.22

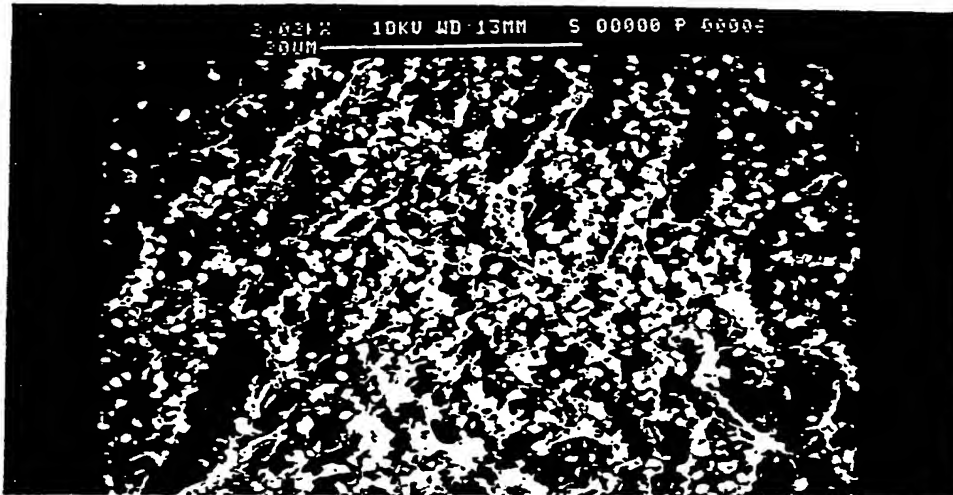


FIG.23



FIG.24

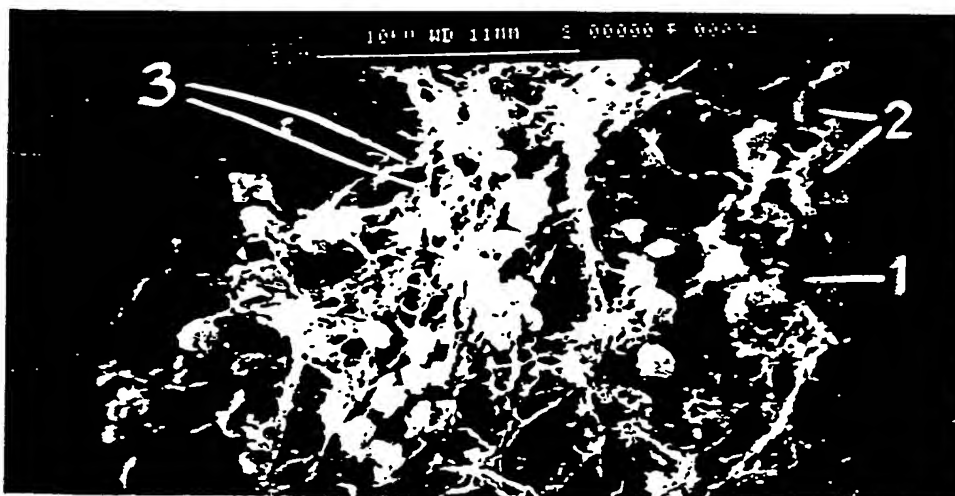


FIG.25

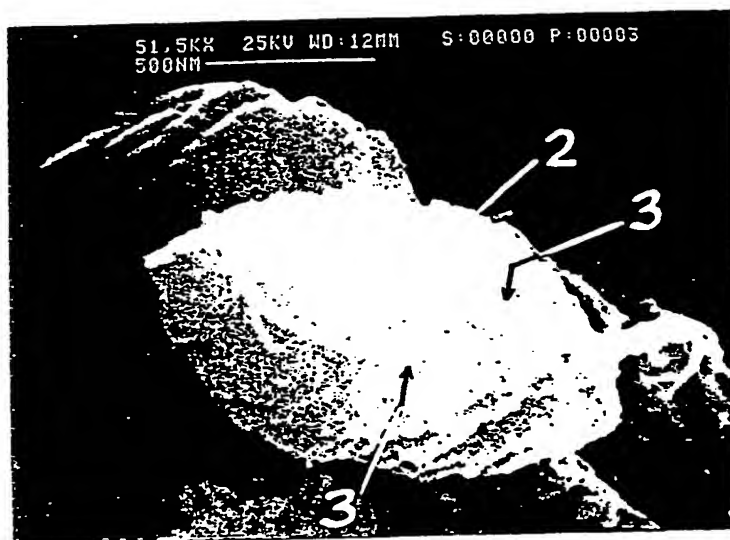


FIG.28

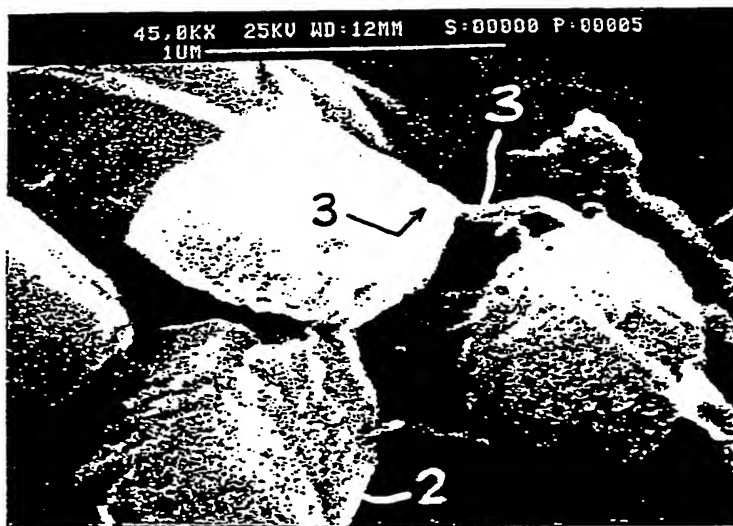


FIG.26



FIG.27

NOVEL COMPOSITE PRODUCT BASED ON FIBERS AND FILLERS,  
AND PROCESS FOR THE MANUFACTURE OF SUCH A NOVEL PRODUCT

The present invention relates to the field of fiber-based products into which it is necessary to incorporate fillers, generally mineral fillers, in order to give them certain physical properties or else to reduce their manufacturing cost.

Examples which should be mentioned are materials employed especially in the field of construction and possessing properties of stability, inertness and flame resistance, which can be used in the form of panels, boards, sheets, tiles or bricks.

The field of papermaking for the production of printing/writing papers, decorative papers, flame-resistant papers, etc. should also be mentioned.

There has long been a perceived need for such products and the prior art has known various processes for obtaining them. It can be considered that the manufacturing technique consists mainly in producing a suspension, generally an aqueous suspension, of partially refined fibers into which a filler of finely divided mineral products, such as calcium carbonate having for example a particle size of between 0.5 and 10 micrometers, is introduced.

The problem which has to be solved in such a technique is that of the bonding between the fibers and the mineral fillers, so that the product obtained after at least partial removal of the aqueous medium has a strength or a cohesion which is in keeping with the stresses, generally mechanical stresses, borne during use.

To date, the only effective method employed consists in incorporating into the suspension one or more retention aids, the purpose of which is to bond the mineral fillers to the fibers. As an example,

polyacrylamide is commonly used to bond calcium carbonate to cellulose fibers.

For the bonding function, such a technique can be considered satisfactory, even though it is subject to a limit in the percentage of fillers incorporated. On the other hand, such a technique suffers from certain disadvantages which it would be particularly desirable to eliminate.

The first disadvantage concerns the appreciable extra production cost due to the presence of the retention aid or aids, which are expensive products.

The second disadvantage is due to the fact that the dewatering process, or process of removal of the aqueous phase, entrains a significant proportion of the retention aid or aids as well as the mineral fillers, which are definitively lost. This results in an economic loss which can be qualified as substantial, and also, above all, in environmental pollution which can only be combated by resorting to an effluent purification plant.

The setting-up and functional maintenance of such a plant again have an adverse effect on the economic balance of the production of such products.

The presence of the retention aid or aids is also responsible for degrading the look-through of the base in the field of papermaking.

Another known technique for incorporating mineral fillers into a fibrous cellulosic substrate is the one described in International patent application WO 92/15 754, published after the priority date of the present patent application.

This intercalated patent application discloses a process which consists in subjecting a pulp of cellulose fibers, free of water and qualified as crumb pulp, containing from 40 to 95% by weight of water, to

a treatment in which it is brought into contact with lime and in which gaseous  $\text{CO}_2$  is injected into the lime-treated pulp inside a pressurised refiner. This treatment makes it possible to obtain a filler of crystalline  $\text{CaCO}_3$  localised essentially in the lumen and the wall of the cellulose fibres.

It should be noted that the treatment is carried out in a dry medium and not an aqueous liquid medium. Furthermore, the composite product obtained is characterised by localisation of most of the crystalline  $\text{CaCO}_3$  within the fibres.

Consequently the  $\text{CaCO}_3$  loading of the papers obtained from said pulp remains relatively limited (less than 20%), which is of the order of those achieved by the loading techniques using retention aids.

One object of the present invention is to overcome the above disadvantages by proposing a novel composite product based on fibres and fillers which satisfies the pursuit of properties referred to above and can be obtained without resorting to the retention aids normally used.

A further object of the present invention is to permit the production of even a highly loaded composite product, in the sense generally understood by such an expression, especially in the field of papermaking, i.e. a composite product in which the mineral loading exceeds 50% by weight of total solids.

The invention further relates to a process for obtaining such a novel composite product capable of being used for different applications.

The novel composite product according to the invention is composed of a fibrocrystalline heterogeneous structure consisting of:

- (a) a plurality of fibres of expanded specific surface area and of hydrophilic character, having a substantial quantity of microfibrils on their surface, these microfibrils preferably having a diameter of less than 5  $\mu\text{m}$ , and

(b) crystals of precipitated calcium carbonate (PCC), organised in clusters of granules which trap the microfibrils and the majority of which are joined directly thereto by mechanical bonding.

5 The present invention further relates to a process comprising essentially the following steps:

- (a) contacting microfibrillated fibres in suspension in an aqueous medium and with moderate agitation, with calcium ions,  $\text{Ca}^{++}$ , introduced by way of lime, and
- 10 (b) the addition, with vigorous agitation, of carbonate ions,  $\text{CO}_3^{--}$ , introduced indirectly by the injection of carbon dioxide,  $\text{CO}_2$ , into the suspension,

in which process, before the addition of  $\text{CO}_2$ :

15 the suspension of microfibrillated fibres and lime has a solids concentration which is less than or equal to 5%, particularly preferably of the order of 2.5% by weight, and

the temperature of the suspension is maintained in the range of from 10 to 50°C,

20 so as to effect in fine crystallisation of  $\text{CaCO}_3$  (PCC) in situ.

By the process of the invention, the precipitated  $\text{CaCO}_3$  crystals are essentially organised in granular clusters of PCC crystals, the majority of which trap the microfibrils and are joined directly thereto by mechanical bonding.

25 Various other characteristics of the subjects of the invention will become apparent from the following detailed description of some preferred embodiments of the products and process of the present invention.

30 Embodiments of the novel composite product are given with reference to the attached diagrams.



Fig. 1 to 3 are scanning electron microscope (SEM) photographs, at different magnifications, of the structure of a composite product based on eucalyptus cellulose fibers refined to 40° SR.

05        Fig. 4 to 6 are similar SEM photographs of the same product obtained with eucalyptus cellulose fibers refined to 60° SCHOPPER-RIEGLER (SR).

      Fig. 7 to 9 are similar SEM photographs of the same product obtained with eucalyptus cellulose fibers  
10 refined to 95° SR.

      Fig. 10 and 11 are SEM photographs comparable to photographs 7 to 9 and corresponding to a higher loading of mineral material.

      Fig. 12 to 14 are SEM photographs, at different  
15 magnifications, of a composite product based on pine fibers refined to 60° SR.

      Fig. 15 to 17 are SEM photographs, at different magnifications, of a composite product based on beech fibers refined to 95° SR.

20        Fig. 18 and 19 are SEM photographs, at different magnifications, of a composite product based on synthetic cellulose acetate fibers. The product used in this case naturally contains microfibrils.

      Fig. 20 to 22 are SEM photographs, at different  
25 magnifications, of a composite product based on acrylic fibers.

      Fig. 23 to 25 are SEM photographs, at different magnifications, of a composite product based on cellulose fibers of bacterial origin, naturally containing  
30 microfibrils.

      Fig. 26 to 28 are SEM photographs, at different magnifications greater than those used in the above photographs, of granules of PCC crystals trapping microfibrils.

35        Fig. 1 to 3 show, at respective magnifications

of 501, 1850 and 5070, that the novel composite product according to the invention is composed of a fibrous structure formed of a mat of elementary fibers 1 of hydrophilic character which, naturally or through  
05 treatment, have a certain specific surface area. The latter is a function of the number of microfibrils 3 with which the surface of each fiber 1 is provided. This assembly of microfibrils can either exist naturally or be obtained by a treatment such as refining  
10 (fibrillation), which consists in passing the fibers between the plates or discs of a refiner according to a conventional procedure.

The fibrous structure has the characteristic of carrying crystals 2 of precipitated calcium carbonate  
15 (PCC) which are uniformly distributed and directly grafted on to the microfibrils 3, preferably without an interface or the presence of a binder or retention aid. It is important to note that these crystals are organized in clusters of granules, the majority of which  
20 trap the microfibrils by reliable and non-labile mechanical bonding.

By way of illustration, Fig. 26, at a magnification of 45,000 X, and Fig. 27 and 28, at magnifications of 51,500 X, show granules of PCC crystals 2  
25 mechanically bonded to the microfibrils 3. The latter are thus trapped in the mass of granules.

It was possible to deduce the fine structure of the granule/microfibril bond by extrapolation, especially with the aid of the test described below.

30 The principle of the test is based on evaluating the quantity of non-hydrolyzable cellulose, i.e. cellulose assumed to be trapped in the mass of granules, in a composite product according to the invention containing 25% by weight of cellulose refined to  
35 95° SR and 75% by weight of PCC.

The methodology of the test is as follows:

- 1 - Manufacture of a composite product by the process according to the invention.
- 2 - Exhaustive enzymatic attack on the composite product: selective enzymatic hydrolysis of the cellulose at 40°C and pH 7, for 6 days, with cellulases (CELLUCLAST<sup>(RTH)</sup> 1.5 L at 500 IEU/g and NOVOZYM<sup>(RTH)</sup> 342 at 500 IEU/g, both marketed by NOVO ENZYMES).
- 3 - Study of the enzymatic hydrolysis residue:
  - a) - Ash content at 400°C = 93.8% on a dry weight basis. It can be deduced from this that the hydrolysis residue comprises about 5% of non-mineral products.
  - b) - Analysis of the 93.8% of ash by cobalt nitrate staining: the mineral part of the hydrolysis residue consists of 100% of calcite.
  - c) - The enzymatic hydrolysis residue is treated with dilute hydrochloric acid at a controlled pH of around 7. The CaCl<sub>2</sub> produced is removed by ultrafiltration and the residue is analyzed by gas chromatography after acid hydrolysis according to the method of SAEMAN (TAPPI 37(8), 336-343) and conversion of the monomers obtained to alditol acetate. This analytical technique makes it possible to assay the quantity of neutral oses present in a sample. It was thus possible to determine that 3% by weight of the starting cellulose is inaccessible to the enzymes and in all probability is trapped inside the granules of PCC, for example as shown in Fig. 26 to 28.

Such an organization differs from those of numerous known mineral fillers, whose crystals form flocs of larger or smaller dimensions when they are integrated into the fibrous network, this integration being effected in the presence of retention aids. Such

a structure does not generally make it possible to have a resistant and durable retention of the filler on the fibers, because of its brittleness.

The novel composite product can have different forms of presentation, such as:

- an aqueous suspension representing an intermediate state of conversion or use,
- a paste with a moisture content of about 60%, for example, also representing an intermediate state of conversion,
- a compact mass with a low water content, for example of about 5%, representing an intermediate state of conversion or definitive state of use,
- a processed product into which the composite product is incorporated after conversion.

The specific surface area of the fibers is greater than 3 m<sup>2</sup>/g, preferably 6 m<sup>2</sup>/g and particularly preferably 10 m<sup>2</sup>/g.

Advantageously, when the fibers are refined, they are refined to a freeness, expressed in SR, which is greater than or equal to 30, preferably 40 and particularly preferably 50.

According to the invention, the composite product comprises a loading of crystals of precipitated calcium carbonate (PCC) which is greater than or equal to 20, preferably 30 and particularly preferably 40% by weight, based on total solids.

One process for obtaining the novel composite product, such as that shown in Fig. 1 to 3, consists in placing an aqueous suspension of fibrous materials of hydrophilic character, for example eucalyptus cellulose fibers refined to 40<sup>3</sup> SCHOPPER-RIEGLER, in an appropriate reactor. Such a suspension, containing from 0.1 to 30% by weight of solids in the form of fibers, preferably 2.5% by weight, is introduced into the reactor

MS.

1.7-7%

with simultaneous slow agitation, at a rate of 2 to 60 kg, depending on the desired proportion of PCC, in the knowledge that these quantities correspond respectively to PCC loadings of 90 and 20% by weight, based on the  
05 total weight of solids in the composite product.

3 kg of an aqueous suspension of lime (calcium hydroxide),  $\text{Ca}(\text{OH})_2$ , containing 10% by weight of solids, are then introduced into the reactor. The lime thus constitutes the source of the  $\text{Ca}^{++}$  ions which are  
10 brought into contact with the fibers.

According to one advantageous characteristic of the process according to the invention, the ratio  $\text{Ca}(\text{OH})_2/\text{fibers}$ , expressed on a dry weight basis, varies from 6:1 to 0.2:1. V

15 With slow agitation, the mixture is then diluted to give a final solids concentration which is less than or equal to 5% by weight, based on the total mass of the mixture, preferably less than or equal to 4% and particularly preferably of the order of 2.5%.

20 As soon as the mixture has stabilized at a temperature of between 10 and 50°C, for example of about 30°C, vigorous agitation is started by means of a moving element rotating for example at a speed of between 100 and 3000 rpm, especially of the order of  
25 500 rpm, and carbon dioxide is introduced at a rate of 0.1 to 30  $\text{m}^3/\text{h}/\text{kg}$  of calcium hydroxide, preferably 15  $\text{m}^3/\text{h}/\text{kg}$ . It is from the carbon dioxide introduced that the carbonate ions,  $\text{CO}_3^{--}$ , which are intended to react with the calcium ions,  $\text{Ca}^{++}$ , are formed.

30 Precipitation then commences and leads to the formation of crystals of calcium carbonate, which can be likened to growth by grafting or nucleation directly on to the fibers, making it possible to obtain a fiber/crystal composite of high mechanical strength.

35 In the chosen Example, the experimental condi

tions favor the formation of rhombohedrally shaped crystals. By changing these conditions, it is possible to obtain scalenohedrally shaped crystals.

05 The reaction continues for 5 to 90 minutes, preferably for about 20 minutes, during which regular control is maintained on the one hand over the pH, which is about 12 at the start of the reaction and drops to 7 at the end of the reaction, and on the other hand over the temperature, which is maintained at about 10 30°C.

The reactions stops when all the lime has reacted with the carbon dioxide, i.e. when the pH has stabilized at around 7.

15 Before the reaction, chelating agents such as ethylenediaminetetraacetic acid, or dispersants such as polyacrylamide, can be added to the aqueous suspension of lime.

As shown in Fig. 1 to 3, the above process makes it possible to obtain regular fine crystals 20 intimately bonded to or directly grafted on to the cellulose microfibrils with a good distribution and a preferential concentration in or on the zones of greatest specific surface area. A comparison of Fig. 1 to 3 reveals such grafting on cellulose fibers refined to 40° SR (specific surface area of 4.5 m<sup>2</sup>/g), carrying 25 crystals which, in the Example, constitute a mass of PCC of about 60% by weight, based on total solids. Fig. 1 to 3 correspond to photographs taken by scanning electron microscopy on samples which have been dried 30 beforehand by the so-called critical point technique.

The critical point desiccation method consists in carrying out the following methodology as:

- Phase no. 1: dehydration (ambient pressure and temperature):

35 Before being subjected to the desiccation operation,

the samples to be analyzed are first dehydrated by successive passes through solutions of acetone (or ethanol) of increasing concentration (30, 50, 70, 90, 100%).

- 05 - Phase no. 2: substitute liquid (temperature: 10°C, pressure: 50 bar):

The sample prepared in this way is introduced into the drying cell of the apparatus, the cell being filled with acetone (or ethanol). Several successive  
10 washes are then carried out with a substitute liquid (CO<sub>2</sub> in the present case) in order to remove all the acetone (ethanol).

- Phase no. 3: desiccation (temperature: 37°C, pressure: 80 bar):

15 The temperature of the enclosure is then raised to 37°C, bringing the pressure to 80 bar. The CO<sub>2</sub> thus changes from the liquid state to the gaseous state without crossing a phase boundary.

After evacuation of the CO<sub>2</sub> gas, the sample is  
20 ready for observation by electron microscopy.

The instrument used is of the CPD 030 type marketed by BOIZIAU DISTRIBUTION.

Fig. 4 to 6, compared with Fig. 1 to 3, show precipitated crystals intimately bonded to the micro-  
25 fibrils in a more homogeneous manner. These Figures correspond to products obtained from cellulose fibers, more particularly eucalyptus fibers, refined to 60° SR, whose specific surface area is 6 m<sup>2</sup>/g and on which a PCC nucleation of 60% by weight of solids has been  
30 produced by the process described above.

These Fig. 4 to 6 were prepared under the same conditions and according to the same parameters as Fig. 1 to 3.

Fig. 7 to 9 correspond to photographs taken by  
35 scanning electron microscopy, at respective magnifica-

tions of 1840, 5150 and 8230, of composite products obtained from eucalyptus fibers refined to 95° SR (specific surface area of 12 m<sup>2</sup>/g).

05 The same operating conditions were selected in this case.

A comparison of these three increasing levels of refining, namely Fig. 1 to 3, Fig. 4 to 6 and Fig. 7 to 9 respectively, show the correlative increase in the number of microfibrils.

10 Fig. 10 and 11 are also photographs of a composite obtained from eucalyptus fibers refined to 95° SR and subjected to the grafting of a filler of PCC crystals. The loading of this composite is about 85% by weight, based on the weight of total solids.

15 Fig. 12 to 14 show the application of the process to pine fibers refined to 60° SR (specific surface area of 6.5 m<sup>2</sup>/g), on which a final PCC crystallization of 65% by weight of solids has been effected.

20 The composite product formed has a similar appearance to those of the previous Examples as regards the structure, the distribution and the homogeneity of the PCC crystals, as well as the shape of these crystals.

25 Fig. 15 to 17 are photographs, at magnifications of 1860, 5070 and 8140, showing composite products obtained from beech fibers refined to 95° SR (12 m<sup>2</sup>/g), on to which a loading of PCC crystals of about 75% by weight of solids has been grafted.

30 Fig. 18 and 19 show a further embodiment of a composite product according to the invention, obtained from synthetic fibers, more particularly cellulose acetate fibers such as those marketed under the reference "FIBRET" by HOECHST CELANESE. Such a product consists of microfibrils with a specific surface area of about  
35 20 m<sup>2</sup>/g. These microfibrils were used as such and were



not subjected, prior to the process, to refining by fibrillation.

6.  
The process was carried out in the manner stated above and the growth of PCC crystals was effected under conditions such that the composite product contained 60% by weight of mineral material, based on solids.

Fig. 20 to 22 are photographs, at magnifications of 526, 1650 and 4010, of a composite product made up of synthetic fibers such as the acrylic fibers marketed under the reference "APF Acrylic Fibers" by COURTAULDS. Such fibers were refined in a VALLEY beater so as to have a high degree of fibrillation corresponding to a specific surface area of about 6 m<sup>2</sup>/g. As a comparative reference, such fibers, which naturally have a freeness of the order of 13° SR, were refined to 17° SR. Crystallization effected under the conditions described above gave a final product containing 75% by weight of PCC, based on the weight of solids, whose crystals have similar shapes and dimensions to those of the previous Examples. 11

An analysis of Fig. 18 to 22 reveals the same general appearance of crystallization as far as the shape of the crystals, the distribution and the homogeneity are concerned.

Fig. 23 to 25 illustrate a novel embodiment of a composite product consisting of cellulose fibers of bacterial origin, marketed under the registered trademark "CELLULON" by WEYERHAEUSER. These cellulose fibers, which have a high specific surface area of the order of 200 m<sup>2</sup>/g and are presented in the form of a thick paste, do not require a prior fibrillation treatment by mechanical refining.

On the other hand, they do need to be dispersed with the aid of an apparatus of the "mixer" type (speed

of rotation of the order of 1000 rpm), in the presence or absence of a dispersant such as carboxymethyl cellulose (CMC). This product is prepared and used at concentrations of about 0.4% by weight of solids.

05           Crystallization effected under the conditions described above gave a final product containing 72% by weight of PCC, based on the weight of total solids.

          As is apparent from the foregoing description, the invention makes it possible to produce a synthetic,  
10   cellulosic composite product which can contain a greater or lesser loading of mineral material, according to the percentage by weight of crystals attached directly to the fibers. Such a product does not include a retention aid and can be obtained by carrying out a  
15   simple and inexpensive process which can be mastered without hidden difficulties.

          Such a composite product can be used as a raw material for the production of construction materials which must possess specific characteristics of  
20   strength, inertness and flame resistance. In such an Application Example, despite the low proportion of fibers present in the composition, it becomes possible, when the fibers employed have a sufficiently open structure, to produce a self-bonding mineral material  
25   exhibiting good cohesion.

          In the field of construction materials, the composite product according to the invention can be produced in the form of boards, facings, bricks, tiles, etc.

30           Another field of application is the paper industry. The composite product, as an aqueous suspension or a paste with a solids concentration of 40% by weight, can be used in a mixture with a traditional fiber suspension to give highly loaded conventional  
35   papers. In this application, a mixture of a suspension

of traditional fibers and a suspension according to the invention is then produced in accordance with the physical characteristics of the products to be obtained. The retention of the fillers in the paper compared with the initial composition is then greater than that conventionally obtained, to the extent of at least 10 to 20 points. This is what is understood, in terms of the present invention, by the expression "highly" loaded paper product.

The invention also permits the manufacture, by a wet process, of substrates or networks of opacified non-woven fibers, in which it is possible to achieve a greater proportion of mineral fillers than by the current techniques.

CLAIMS

1. A composite product which is composed of a fibrocrystalline heterologous structure consisting of:
  - 5 (a) a plurality of fibres of expanded specific surface area and of hydrophilic character, having a substantial quantity of microfibrils on their surface, and
  - (b) crystals of precipitated calcium carbonate (PCC), organised essentially in clusters of granules, which
  - 10 trap the microfibrils and are joined directly thereto by mechanical bonding.
2. A product according to claim 1, wherein the specific surface area of the fibres is greater than  $3 \text{ m}^2/\text{g}$ .
3. A product according to claim 2, in which the specific
- 15 surface area is greater than  $6 \text{ m}^2/\text{g}$ .
4. A product according to claim 2, in which the specific surface area is greater than  $10 \text{ m}^2/\text{g}$ .
5. A product according to any preceding claim, wherein the fibres used are refined (fibrillated).
- 20 6. A product according to any preceding claim, which comprises an amount of crystals of precipitated calcium carbonate (PCC) which is greater than or equal to 20% by weight, based on total solids.
7. A product according to claim 6, in which the amount of
- 25 PCC is greater than 30% by weight.
8. A product according to claim 6, in which the amount of PCC is greater than 40% by weight.
9. A product according to any preceding claim, wherein the fibres are cellulose fibres.
- 30 10. A product according to any of claims 1 to 8, wherein the fibres are synthetic fibres.
11. A product according to any preceding claim, which is presented in the form of an aqueous suspension.
12. A product according to claim 11, in which the
- 35 suspension has a solids concentration of less than 5% by weight.

13. A product according to any of claims 1 to 10, which is presented in the form of a paste.

14. A product according to claim 13, in which the paste has a solids concentration of at least 40% by weight.

5 15. A product according to any of claims 1 to 10, which is presented in the form of a compact mass.

16. A product according to claim 15, in which the mass has a water content of about 5% by weight.

10 17. A process for the manufacture of a composite product comprising essentially the following steps:

(a) contacting microfibrillated fibres in suspension in an aqueous medium and with agitation, with calcium ions,  $\text{Ca}^{++}$ , introduced as lime, and

15 (b) the addition, with vigorous agitation, of carbonate ions,  $\text{CO}_3^{--}$ , introduced indirectly by the injection of carbon dioxide,  $\text{CO}_2$ , into the suspension,

in which process, before the addition of  $\text{CO}_2$ :

20 the suspension of microfibrillated fibres and lime has a solids concentration which is less than or equal to 5% by weight, and

the temperature of the suspension is maintained in the range of from 10 to 50°C

so as to effect crystallisation of  $\text{CaCO}_3$  (PCC) in situ.

25 18. A process according to claim 17, in which the product is as defined in any of claims 1 to 16.

19. A process according to claim 17 or 18, wherein the vigorous agitation carried out in the  $\text{CO}_2$  injection step is carried out in a mixer having a speed of rotation of between 100 and 3000 rpm.

30 20. A process according to any of claims 17 to 19, in which the suspension of fibres immediately before addition of  $\text{CO}_2$  has a solids concentration of less than 4% by weight.

35 21. A process according to claim 20, in which the said solids concentration is about 2.5% by weight.

22. A process according to any of claims 17 to 21, in which the CO<sub>2</sub> is added until the pH of the suspension has reached about 7.

5 23. Use of the product according to any of claims 1 to 16, in the production of construction materials.

24. Use of the product according to any of claims 1 to 16, in the production of highly loaded paper products.

25. Use of the product according to any of claims 1 to 16, in the production of opacified non-woven substrates.

**Patents Act 1977****Examiner's report to the Comptroller under  
Section 17 (The Search Report)**

Application number

GB 9307486.2

**Relevant Technical fields**(i) UK Cl (Edition L ) D1R (RDB, RDC, RDK, REZ, RFA, RFB,  
RFZ, RGA, RGB, RGZ)

(ii) Int Cl (Edition 5 ) D21H; D21J

**Databases (see over)**

(i) UK Patent Office

(ii) ONLINE DATABASES: WPI

**Search Examiner**

ALEX LITTLEJOHN

**Date of Search**

10 MAY 1993

Documents considered relevant following a search in respect of claims 1-25

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
X	WO 88/02048 A1 (DU PONT) see whole document, eg page 6 lines 21, 22 and page 9 lines 8-17	1,9,10,11

Category	Identity of document and relevant passages	Relevant to claim(s)

#### Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

**Databases:** The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).